


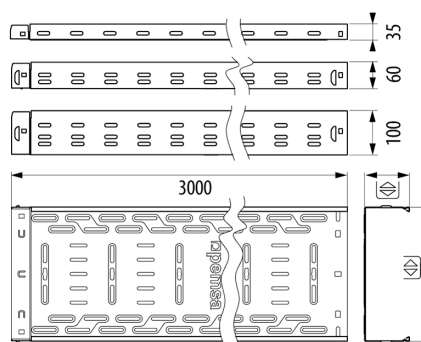

Description

Perforated and embossed metal cable tray with a screwless snap-fit connect system, Available in heights of 35, 60, and 100 mm, with PG and AZ+ protection systems. New profile design and flat safety edge maximize contact with the cover. The Pemsaband® Speed Perforated cable tray is designed for supporting and managing electrical and telecommunications cables in medium and light loads. Its easy assembly, thanks to a screwless, snap-fit quick-connect system, saves on material and labor costs. The unique, patented design of longitudinal S-shaped perforations and embosses enhances the cable tray's load-bearing capacity.

Advantages

Revolutionary screwless snap-fit quick-connect system, easy to install in just one step, and requires no additional tools or accessories. This innovative solution streamlines your installation process, saving you money on both materials and labor. Say goodbye to hassles and save time with our efficient and practical connection system!

Wide variety of sizes: heights 35, 60 and 100 mm, and widths from 60 to 600 mm, PG and AZ+ protection systems, and a complete range of accessories from the Pemsaband® family that allows adaptation to the requirements of each electrical installation.

New profiled and flat safety edge design, created to offer maximum protection for your cables and reinforce the cable tray structure. With an 80% increase in the contact surface between the cable tray and the cover, it ensures optimal electrical continuity, meeting the standards of IEC 61357 Edition 3.

Innovative S-shaped perforation and embossing design not only strengthens the cable tray length but also maximizes cable tying options. This design is carefully engineered to provide load-bearing capacity and functionality for your installations. With a refreshed and distinctive aesthetic, our trays offer a modern and attractive look while meeting the highest quality and safety standards.

Regulatory compliance: designed and developed in accordance with edition 3 of IEC 61537, Directive 2014/35/EU (CE marking) and UKCA marking, ensuring safety and reliability in electrical installations.

Applications

A system designed for the routing, support, transport, and distribution of cables in electrical and/or telecommunications installations. It is applicable to, among others, the following areas: - Buildings, including public buildings, shopping centers, and Data Centers (DCs) . - Civil works and infrastructure, such as tunnels, parking garages, airports, and subway and railway lines. - The service and industrial sectors, being suitable for applications in the manufacturing, chemical, and food industries. The system is suitable for rapid installation indoors in controlled atmospheres, as well as in outdoor installations or humid environments, selecting the appropriate protection and finishing system in each case based on the environmental and service conditions.

Solutions



Main technical characteristics

 35, 60, 100	 60, 100, 150, 200, 300, 400, 500, 600	 3	 Steel with surface coating	 20 J	 IP23
 -50 / 150 °C	 A1 No combustible	ETIM 10 EC000047			

Product data

Ⓢ	Class EC 61537	Ⓢ	Ⓢ	Ref	kg/L	Ⓢ	mm²
PG	Class 3	35	60	82004471	0,615	24	2100
PG	Class 3	35	100	82004472	0,773	24	3500
PG	Class 3	35	150	82004473	0,956	12	5250
PG	Class 3	35	200	82004474	1,366	12	7000
PG	Class 3	35	300	82004475	1,832	12	10500
PG	Class 3	60	60	82004476	0,796	24	3600
PG	Class 3	60	100	82004477	0,954	24	6000
PG	Class 3	60	150	82004478	1,361	12	9000
PG	Class 3	60	200	82004479	1,583	12	12000
PG	Class 3	60	300	82004480	2,394	6	18000
PG	Class 3	60	400	82004481	3,352	6	24000
PG	Class 3	60	500	82004482	4,911	6	30000
PG	Class 3	60	600	82004483	5,718	6	36000
PG	Class 3	100	100	82004484	1,515	12	10000
PG	Class 3	100	200	82004485	2,280	6	20000
PG	Class 3	100	300	82004486	2,824	6	30000
PG	Class 3	100	400	82004487	4,780	6	40000
PG	Class 3	100	500	82004488	5,528	6	50000
PG	Class 3	100	600	82004489	6,334	6	60000
AZ+	Class 8	35	60	82004509	0,734	24	2100
AZ+	Class 8	35	100	82004510	0,924	24	3500
AZ+	Class 8	35	150	82004511	1,143	12	5250
AZ+	Class 8	35	200	82004512	1,366	12	7000
AZ+	Class 8	35	300	82004513	2,430	12	10500
AZ+	Class 8	60	60	82004514	0,952	24	3600
AZ+	Class 8	60	100	82004515	1,141	24	6000
AZ+	Class 8	60	150	82004516	1,361	12	9000
AZ+	Class 8	60	200	82004517	1,583	12	12000
AZ+	Class 8	60	300	82004518	2,728	6	18000
AZ+	Class 8	60	400	82004519	3,352	6	24000
AZ+	Class 8	60	500	82004520	4,911	6	30000
AZ+	Class 8	60	600	82004521	5,718	6	36000
AZ+	Class 8	100	100	82004522	1,515	12	10000
AZ+	Class 8	100	200	82004523	2,598	6	20000
AZ+	Class 8	100	300	82004524	3,222	6	30000



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Reijband, Pemsaband, Inducanal, Reijtech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Ⓢ	Class BC 61537			Ref	kg/u		mm²
AZ+	Class 8	100	400	82004525	4,780	6	40000
AZ+	Class 8	100	500	82004526	5,528	6	50000
AZ+	Class 8	100	600	82004527	6,334	6	60000

Ⓢ Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

Ⓜ Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic








Load diagrams

Ensayos de carga CTA instalaciones verticales en desarrollo horizontal

Valores obtenidos según la norma IEC 61537, edición 3, según ensayo horizontal multi vano recogido en el punto 10.5.1 de dicha norma, con un coeficiente de seguridad del 170% y sin alcanzar en ningún caso el colapso.

Load Tests for SWL installed in vertical horizontal way

Values obtained in accordance with IEC 61537, edition 3, according to the horizontal tests of multiple spans listed in point 10.5.1 of this standard, with a safety factor of 170% and without collapse in any case.

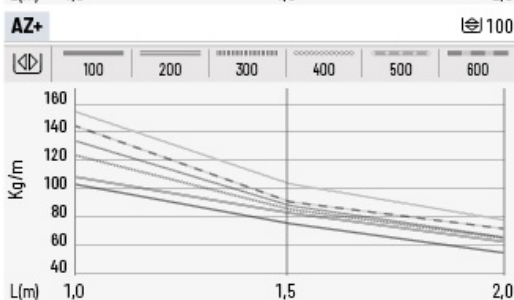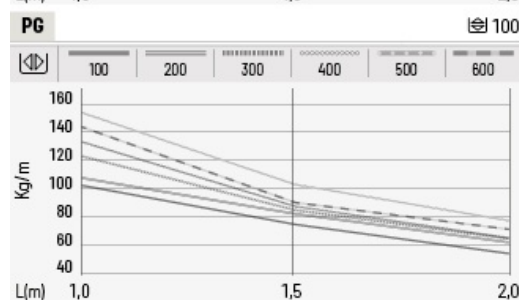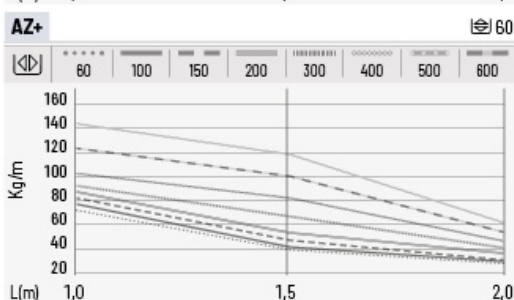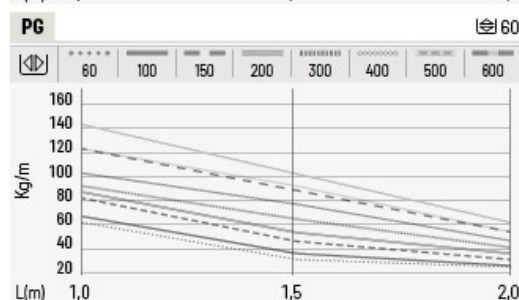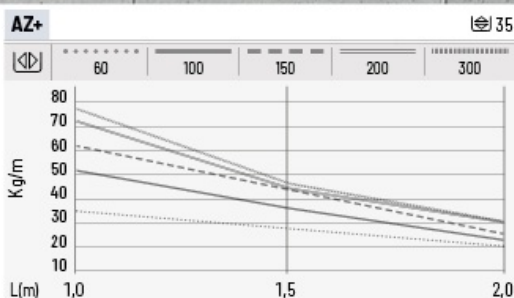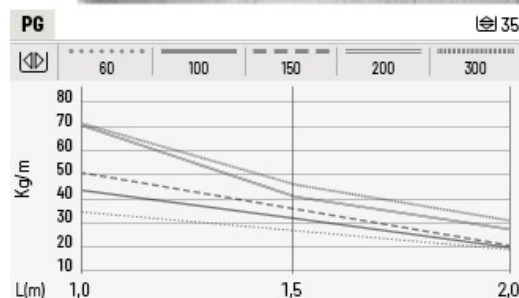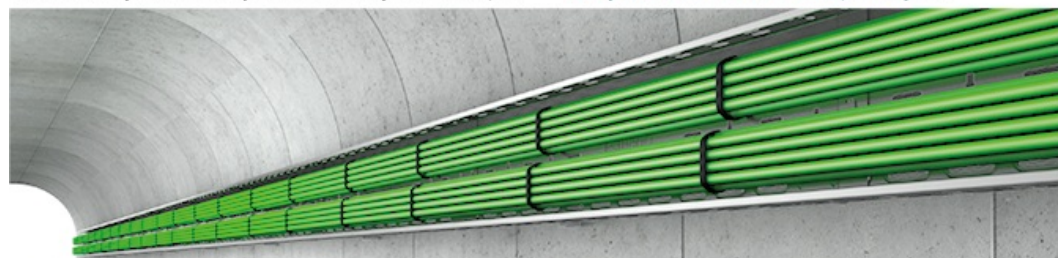

Las cargas expresadas en la tabla reflejan las **cargas máximas de trabajo admisible (CTA)** y que corresponden a la capacidad máxima de llenado. En una instalación en vertical - horizontal, para cantidad máxima de cables a incluir en una bandeja depende del agrupamiento y las opciones de embreado y fijación de los cables para que la instalación sea segura.

The loads shown in the table reflect the **maximum allowable working loads (MWL)** and correspond to the maximum filling capacity. In a vertical-to-horizontal installation, the maximum number of cables to be included in a tray depends on how the cables are bunched and the tying and securing options used to ensure a safe installation.










Pemsaband Speed Perforated

Ensayos de carga CTA instalaciones horizontales

Valores obtenidos según la norma IEC 61537, edición 3, según ensayo horizontal multi vano recogido en el punto 10.3.4 de dicha norma, con un coeficiente de seguridad del 170% y sin alcanzar en ningún caso el colapso.

Load Tests for SWL installed in the horizontal way

Values obtained in accordance with IEC 61537, edition 3, according to the horizontal tests of multiple spans listed in point 10.3.4 of this standard, with a safety factor of 170% and without collapse in any case.

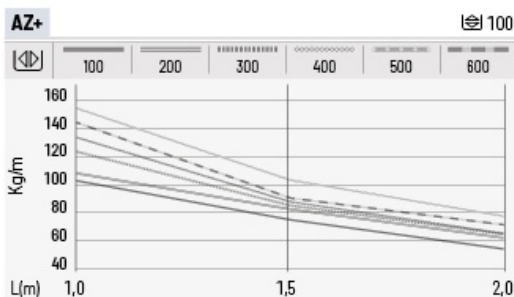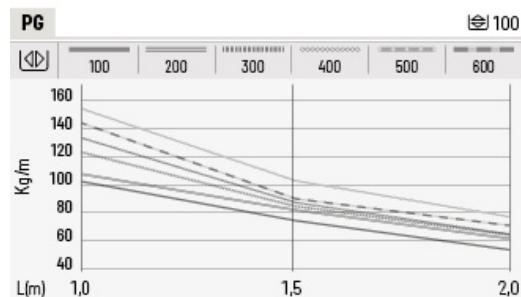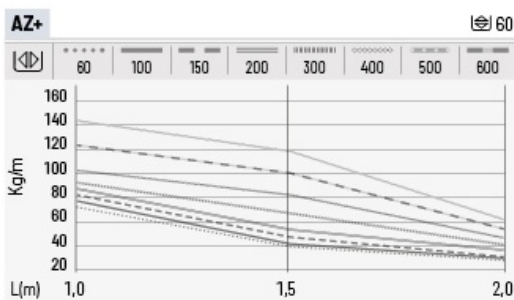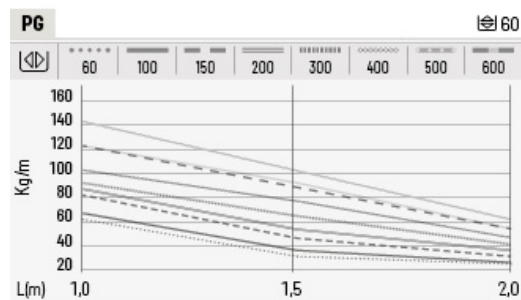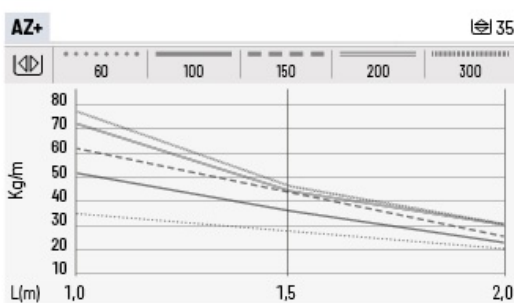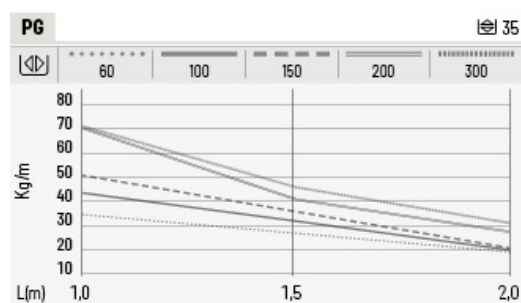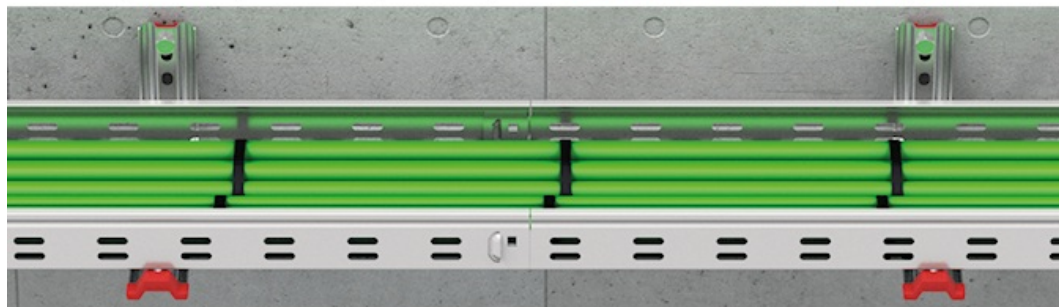

Pemsaband Speed Perforated


Ensayos de carga CTA instalaciones verticales en desarrollo vertical

Valores obtenidos según la norma IEC 61537, edición 3, según ensayo vertical - vertical multi vano (V-V) recogido en el punto 10.6 de dicha norma, con un coeficiente de seguridad del 170% y sin alcanzar en ningún caso el colapso.

SWL load tests for vertical installations in vertical development.

Values obtained in accordance with IEC 61537, edition 3, according to the vertical - vertical multi-span (V-V) tests listed in point 10.6 of this standard, with a safety factor of 170% and without reaching collapse in any case.

		PG	AZ+	CTA/SWL V-V kg/m (1 m)
35	60	82004471	82004509	35
	100	82004472	82004510	43
	150	82004473	82004511	50
	200	82004474	82004512	71
	300	82004475	82004513	70
60	60	82004476	82004514	60
	100	82004477	82004515	66
	150	82004478	82004516	82
	200	82004479	82004517	87
	300	82004480	82004518	92
	400	82004481	82004519	102
	500	82004482	82004520	122
	600	82004483	82004521	143
100	100	82004484	82004522	102
	200	82004485	82004523	107
	300	82004486	82004524	122
	400	82004487	82004525	133
	500	82004488	82004526	143
	600	82004489	82004527	153

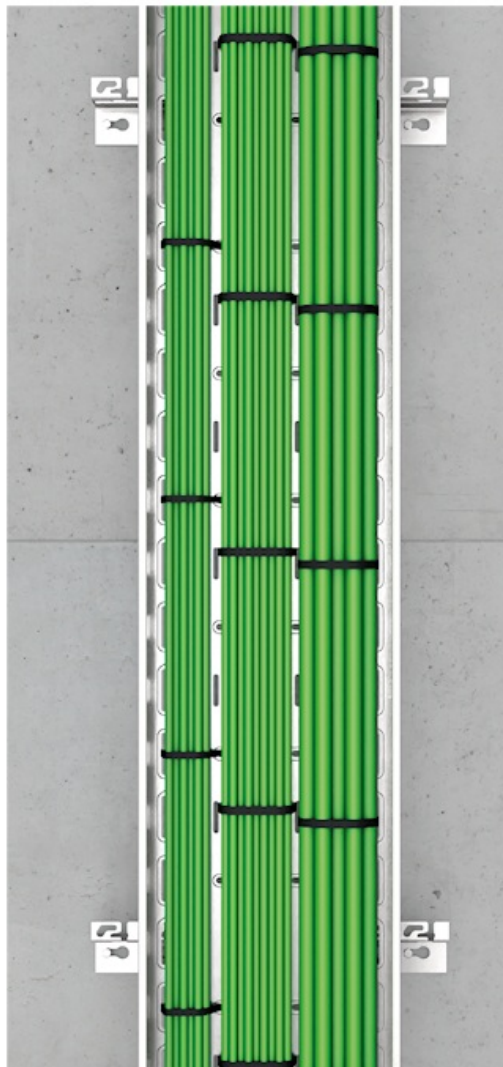

Las cargas expresadas en la tabla reflejan las **cargas máximas de trabajo admisible (CTA)** y que corresponden a la capacidad máxima de llenado. En una instalación en vertical - vertical, para cantidad máxima de cables a incluir en una bandeja depende del agrupamiento y las opciones de embreado y fijación de los cables para que la instalación sea segura.

The loads shown in the table represent the **maximum allowable working loads (SWL)** and correspond to the maximum filling capacity. In a vertical-to-vertical installation, the maximum number of cables to be accommodated in a cable tray depends on the cables are bunched and the tying and securing options used to ensure a safe installation.

Product applications



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

